




Acrylic Weather Paint

Acristar Shield

5 years protection

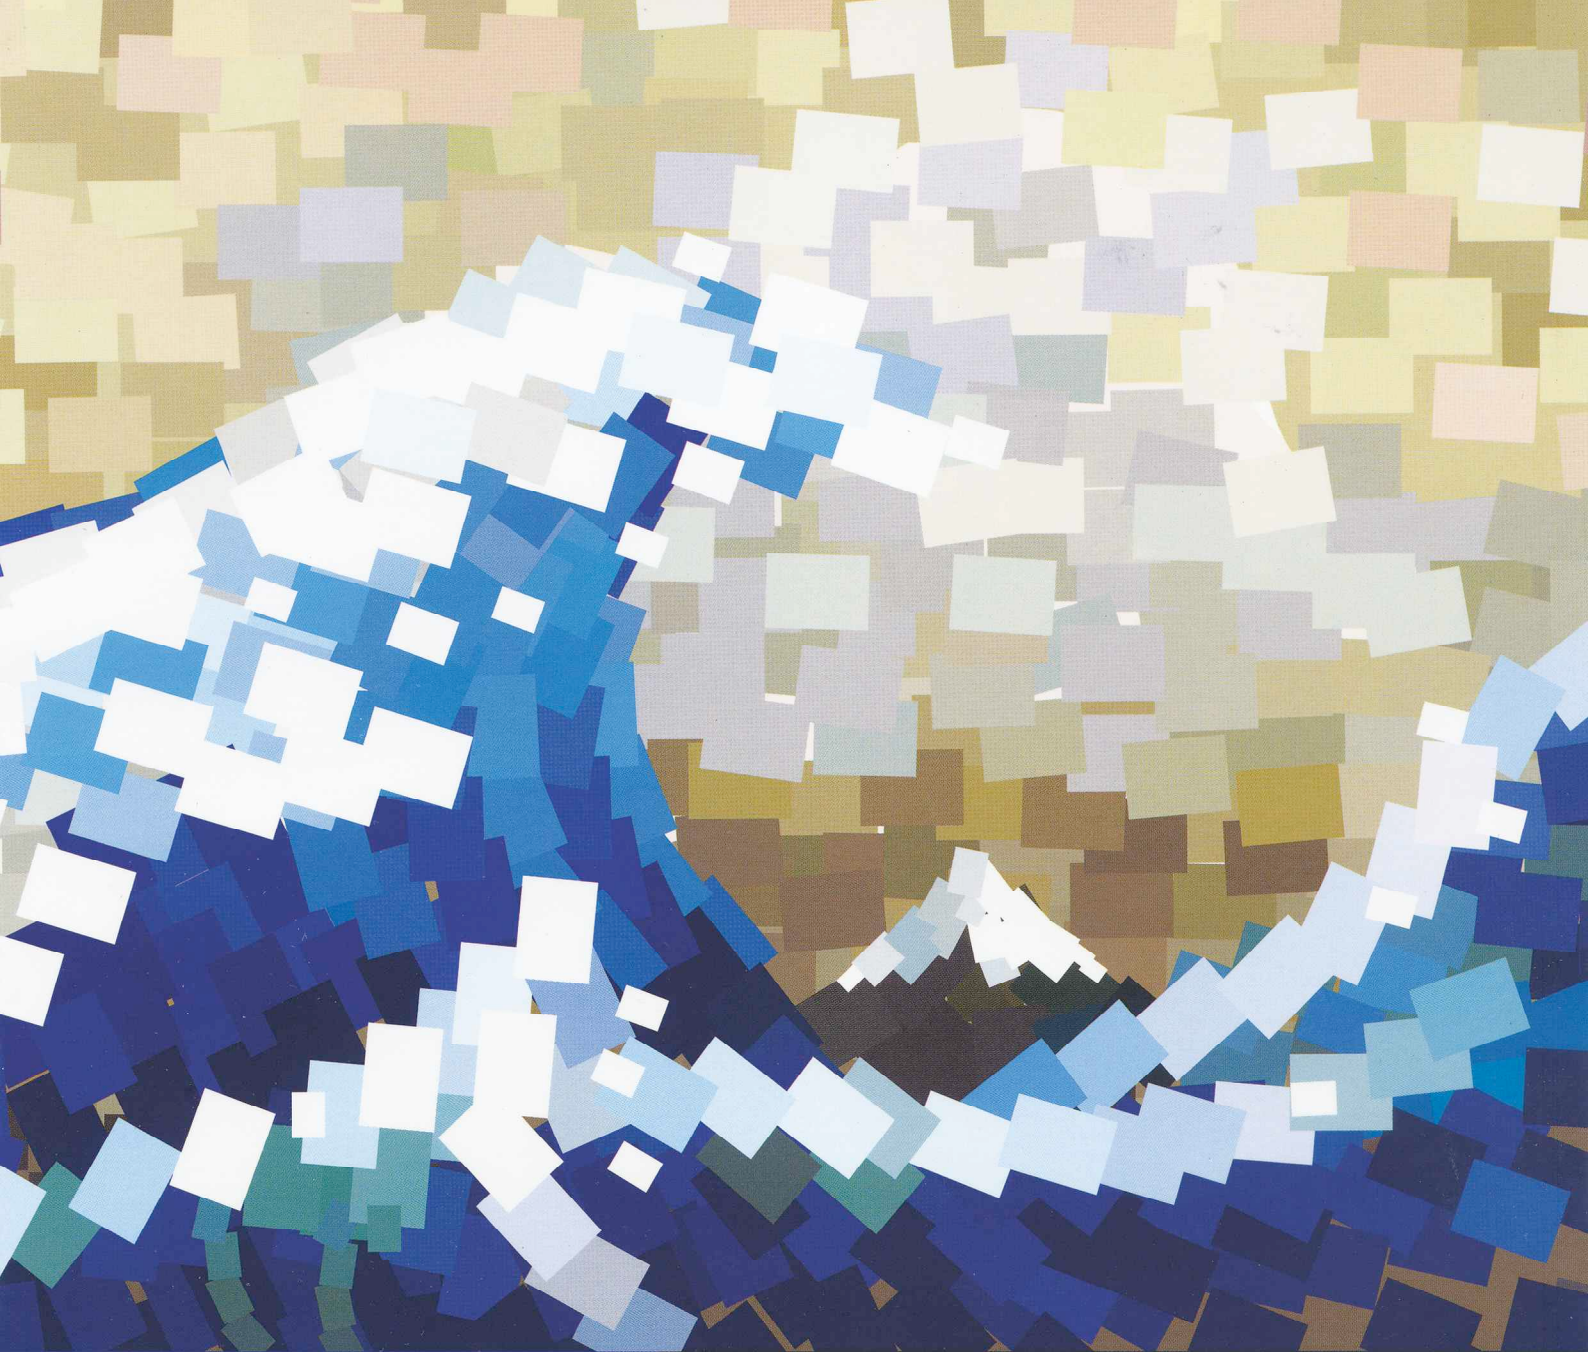

Added Values of Colours
エスケー化研株式会社


Colour shown here are
as close as printing technics allow.
Also available in white AS 16000 and black AS 16045.

Warna-warna yang ditunjukkan adalah semirip yang dapat dihasilkan dengan teknik percetakan.
Juga terdapat dalam warna putih AS 16000 dan hitam AS 16045.

本图所示色泽，为印刷技术可能达致最接近效果，亦各有白色AS16000 和黑色AS16045。
有5公升及20公升装。

Premium colour.

● Limited Stock in 20 Liter

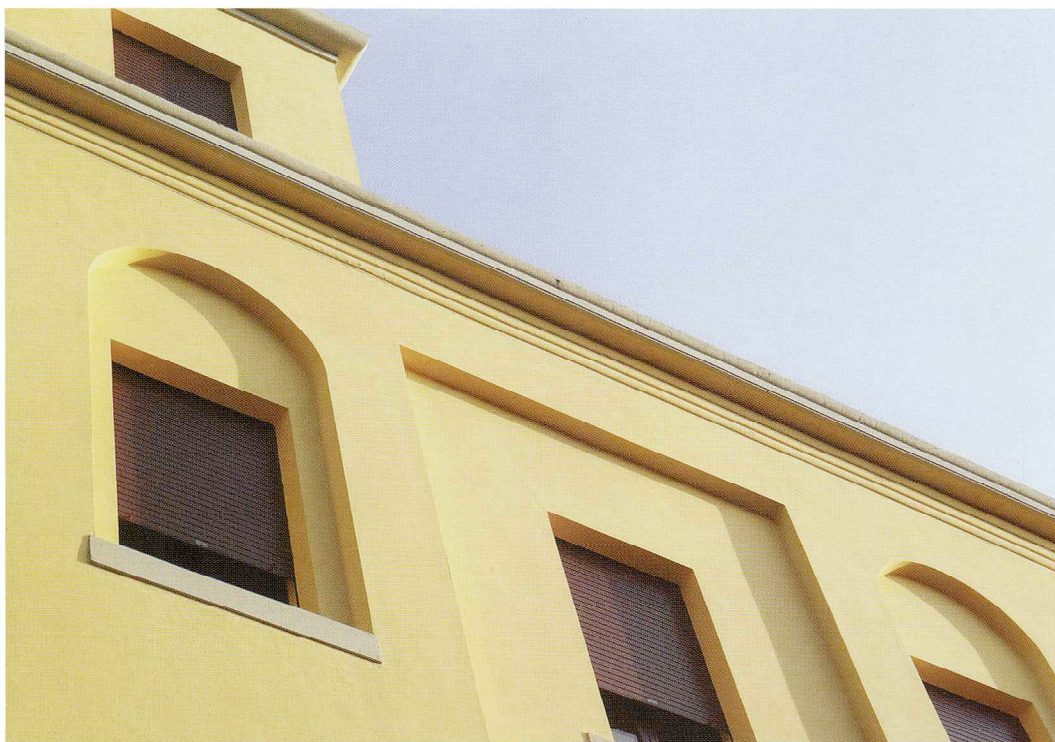

Banana

AS12138



Ivory

AS16002




Galaxy

AS12334




Mandarin Fields

AS16565




Misty Grey

AS16013



Orion

AS16273



Sand Dune

AS14371



Zambezi Rocks

AS16566



Savory ●

AS13350



Sandstone

AS12653



Tangerine

AS14254




Tanzania ●

AS13598




Monterrey

AS12662



Vistusik Brown

AS12655



Chelsea

AS19325

Acristar Shield

Acrylic weather paint ideal
for exterior application




Calypso

AS14255



Duchess

AS14258



Spring Yellow ●

AS17388



Glacier ●

AS11190



Baggio ●

AS17788



Lakers ●

AS17566



Fresh Green ●

AS13190



Ajaz ●

AS17997



Pink Tiger ●

AS13323



Carnival Pink ●

AS12354



French Linen

AS16535



Nakata ●

AS17229



Butter Milk

AS12140



Apricot

AS12135



Gold

AS16453




Wira Blue

AS11221




Butterfly

AS11207



Brown Yellow

AS16027




Orange

AS17105



Savannah

AS13345



Daisy

AS16454



Terra Cotta

AS12199





Acristar Shield

Acrylic Weather Paint



SIRIM
Certified To
MS 134 : 1989
Certification No. : P8057101

Application Data

Touch Dry	: Depends on temperature and humidity.
Recoating Interval	: 2 - 3 hours.
Coverage	: 8 - 10m ² /Lit, depending on substrate condition.
No. of finished coats	: Min 2 coats.

Directions for Use

- *Stir thoroughly. Apply with brush, roller or spray gun.
- *This paint is ready for use. Thinning (if required) of maximum 5% of water.
- *For best results, seal with one coat of SK Acrylic Sealer, followed by two coats of Acristar Shield.

Available in 5 litres & 20 litres.

Data Penggunaan

Kering disentuh	: Bergantung kepada suhu and kelembapan.
Tempoh lapisan semula	: 2 - 3 jam.
Liputan	: 8 - 10m ² /Lit, bergantung kepada keadaan permukaan.
Jumlah lapisan	: Minimum 2 lapis.

Peraturan Penggunaan

- *Kacaukan cat sehingga sebati. Gunakan berus, penggelek atau penyembur untuk mengecat.
- *Cat ini boleh digunakan segera tanpa pencairan. Jika perlu, hanya cairkan dengan maksimum 5% air.
- *Untuk mencapai prestasi yang baik, gunakan 1 lapisan SK Acrylic Sealer dan 2 lapisan Acristar Shield.

Terdapat dalam 5 liter & 20 liter.

应用资料

漆干	: 视气候与潮湿度而定。
重涂刷时间	: 相隔 二至三小时。
可图面积	: 每公升八至十平方米， 胥表面状况。
涂层数次	: 最少两层。

用法

- *使用前将漆料彻底搅匀。 可用漆扫，滚轴涂刷或喷漆器喷射。
- *要取得最好的效果，髹上一层SK Acrylic Sealer，在加两层Acristar Shield。
- *油漆能够立即使用。 如果要调稀， 可加入最多5% 的清水。

Company Information

Japan Head Office 日本
SK Kaken Co. Ltd.
5 - 25, 3 - Chome, Nakahozumi, Ibaraki City, Osaka, Japan 567-0034.
Tel: (81 - 721) - 21 - 7727 Fax: (81 - 726) - 21 - 7728

Malaysia 马来西亚
SK Kaken (M) Sdn. Bhd.
Suite 13.01, Level 13, Centrepoint South, The Boulevard,
Mid Valley City, Lingkaran Syed Putra, 59200 Kuala Lumpur.
Tel: (603) 2282 9800 Fax: (603) 2282 9810
Website: www.skk.com.my

Hong Kong 香港
SKK (HK) Co. Ltd.
Suites 1007 - 1010, 101F, Pah Sing Financial Centre,
108, Gloucester Road, Wanchai, Hong Kong.
Tel: 852 - 2529 - 3968 Fax: 852 - 2527 - 0299

Singapore 新加坡
SK Kaken (S) Pte. Ltd.
14, Pandan Road, Singapore 609262.
Tel: (65) 6274 0020 Fax: (65) 6278 0060

China (Shanghai) 中国上海
Sikoku Kaken (Shanghai) Co. Ltd.
Units 3 - 6, 25F, Far East Building A No. 319 Xianxia Road,
Changning District, Shanghai, China.
Tel: 86 - 21 - 6209 - 9169 Fax: 86 - 21 - 6209 - 9189

China (Beijing) 中国北京
Sikoku Kaken (Beijing) Co. Ltd. B.J. Branch
Units 9 - 12, 25F, China World Tower 1, Jianguomenwai Road,
Beijing, China.
Tel: 86 - 10 - 8505 - 6187 Fax: 86 - 10 - 8505 - 6188

China (Shenzhen) 中国深圳
Sikoku Kaken (Shenzhen) Co. Ltd. Shenzhen Branch
1008, Office Tower Shunhing Square Di Wang Commercial
Centre, 5002 Shennan Dong Road, Shenzhen, China.
Tel: 86 - 755 - 2583 - 8100 Fax: 86 - 755 - 2583 - 0488

Korea 韩国
SK Kaken (Korea) Co. Ltd.
#1414 Samhuan B/D, 705 - 9, Yeoksam-Dong, Gangnam-gu,
Seoul 135 - 080, Korea.
Tel: (82) 2562 - 1592 Fax: (82) 2562 - 1594

Thailand 泰国
SK Kaken (Thailand) Co. Ltd.
181/1 Sg Tower 5th Floor, Unit 504 - 505,
Soi MahaDiek Luang 3, Ratchadamri Road Lumphee,
Pathumwan Bangkok 10330 Thailand.
Tel: 66 - 2 - 651 - 8722 Fax: 66 - 2 - 651 - 8721